



Europäisches Patentamt
European Patent Office
Office européen des brevets



Publication number:

0 451 773 A2

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 91105570.5

(31) Int. Cl. 5: H02K 41/035, G11B 19/20,
G11B 17/022, G06K 13/06

(22) Date of filing: 09.04.91

(20) Priority: 09.04.90 JP 93505/90
09.04.90 JP 93506/90
12.04.90 JP 97216/90

(43) Date of publication of application:
16.10.91 Bulletin 91/42

(64) Designated Contracting States:
CH DE ES FR GB IT LI SE

(71) Applicant: NIPPON CONLUX Co., Ltd.
2-2, Uchisaiwai-Cho 2-Chome
Chiyoda-Ku Tokyo-To(JP)

(72) Inventor: Yamazaki, Koichi

25, Koyama
Sakado-Shi, Saitama-Ken(JP)
Inventor: Noda, Kazuo
4-15-5, Hirado, Totsuka-Ku
Yokohama-Shi, Kanagawa-Ken(JP)
Inventor: Nakamura, Eiichi
4-5-7, Nishi-Hashimoto
Sagamihara-Shi, Kanagawa-Ken(JP)

(74) Representative: Reichel, Wolfgang, Dipl.-Ing.
et al
Reichel und Reichel Parkstrasse 13
W-6000 Frankfurt am Main 1(DE)

(64) Linear motor.

(67) A linear motor having a magnetic circuit and a moving coil, the magnetic circuit comprising a linear yoke provided at the center of the circuit and a pair of linear magnets, the linear yoke and the pair of linear magnets forming a pair of linear gaps with the linear yoke interposed therebetween, the magnetic circuit applying a magnetic field to the linear gaps, the movable coil mounted on the linear yoke of the magnetic circuit being moved along the linear yoke by an electromagnetic action to the magnetic circuit when the movable coil is powered, wherein the linear magnet has a larger magnetic force at opposite end portions in the longitudinal direction of the linear magnet than at an intermediate area, the magnetic reluctance of the magnetic circuit is made large to obtain a driving current of the movable coil corresponding to the magnetic reluctance when the moving coil moves at the intermediate area of the linear magnet, or the magnetic circuit is mounted on a plate made of material having the same magnetic reluctance as the linear yoke. An information recording/reproducing apparatus having a card transport stage for transporting an information recording medium and a laser unit for radiating a laser beam to the information recording medium, the information recording/reproducing apparatus writing and reading

information to and from the information recording medium while reciprocally moving the card transport stage and linearly and reciprocally moving the information recording medium and applying a laser beam to the information recording medium, wherein the apparatus comprising a transport unit wherein the plane of driving force by driving means for reciprocally moving the card transport stage is made substantially flush with the center of a guide shaft for sliding the transport stage.




FIG. 1

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a card driving linear motor used for transporting a card such as an optical card.

Description of the Related Art

A linear motor has been used for transporting a card such as an optical card or driving an optical head or the like.

A linear motor is constructed of a stator and a rotor or moveable member. The stator has a pair of magnetic circuits each constructed of a linear yoke and another yoke. Within the spaces defined by the two linear yokes and the other two yokes, a pair of linear magnets are mounted on the other two yokes while providing linear gaps between the magnets and the linear yokes. The rotor has a moving coil and is mounted on the linear yokes constituting the magnetic circuits. When the moving coil is powered, the rotor linearly moves along the linear yokes.

Referring to Figs. 34 and 35 showing an example of a conventional linear motor, linear magnets 1 and 2 magnetized in the thickness direction are mounted on the inner surfaces of yokes 3 and 4 with the same poles facing each other, the yokes having both end portions being bent. Linear yokes 5 and 6 inserted into a bobbin 8 are integrally coupled to the yokes 3 and 4. The bobbin 8 has a moving coil 7 wound about it.

The moving coil 7 is mounted to a holding member 9 formed in the lower portion of a shuttle 11 which extends over the moving coil, yokes, and magnets. The shuttle 11 has bearings 12 and 13 at opposite sides thereof. Guide shafts 14 and 15 are coupled to the bearings 12 and 13.

With the linear motor constructed as above, magnetic fluxes from the N poles of the linear magnets 1 and 2 go toward the inner linear yokes 5 and 6 while traversing the moving coil 7, and return back via the linear yokes 5 and 6 to the S poles of the linear magnets 1 and 2. If a d.c. current flows through the moving coil 7, the magnetic fluxes of the linear magnets 1 and 2 link with the d.c. current to provide an electromagnetic action therebetween so that a mechanical action force is generated between the linear magnets 1 and 2 and the moving coil 7 to thereby move the latter.

A thrust force F applied to the moving coil 7 is generally given by $F = BIl$, where B is a magnetic flux density acting to the moving coil, i is a coil current, and l is an effective coil length activated by a magnetic field. In order to move the shuttle 11 (moving coil 7) in the reverse direction, the current

supplied to the moving coil 7 is reversed.

In a transport apparatus for transporting a card such as an optical card by using a linear motor of the type described above, it is necessary to reciprocally move an optical card at a high speed, and to decelerate, stop, and accelerate the card within a limited distance or in a limited time.

A conventional transport apparatus is associated, however, with some problem. Namely, magnetic fluxes from the permanent magnets for generating magnetic fields in the linear gaps in the same direction are uniform, i.e., the permanent magnets each are formed with a single magnet constituting a magnetic circuit. As a result, if an acceleration speed (deceleration speed) is made faster, magnetic saturation occurs at the opposite end portions of the linear yokes 5 and 6 and other yokes 3 and 4, so that the magnetic flux density reduces at the acceleration speed (deceleration speed) area and a desired acceleration speed (deceleration speed) cannot be obtained.

Another conventional linear motor is shown in Fig. 36 wherein a single magnet is used to form a magnetic circuit. The magnetic flux density distribution gradually changes in the longitudinal direction of the motor. It is therefore necessary to flow a very large current in order to obtain a sufficient thrust force at the acceleration speed area, resulting in a large diameter of coil winding and a large weight of the driving system.

Another conventional linear motor is shown in Fig. 37 wherein yokes 3, 4, 5, and 6 constituting a magnetic circuit are designed to have a sufficiently small magnetic reluctance. Although this linear motor has a good magnetic characteristic, the thickness of a yoke becomes large, resulting in a large-sized magnetic circuit.

In a conventional optical head driving mechanism using linear motors shown in Figs. 38 and 39, the centers of guide shafts are not flush with the plane of driving force of the linear motors serving as driving means. This is also true for the case of a card transport mechanism. In Figs. 38 and 39, two parallel guide shafts 2' and 3' are disposed different in height at both sides of a transport stage 1' having an optical head. The guide shafts 2' and 3' are inserted into two slide bearings 4' such that the transport stage 1' can be guided along the guide shafts 2' and 3'.

Moving coil type linear motors are provided at both sides of the transport stage 1'. An elongated rectangular yoke 5' is disposed above and along the guide shaft 2'. A permanent magnet 6' magnetized in the thickness direction thereof is mounted at the yoke 5' at the position remotely from the transport stage 1'. The yoke 5' is inserted into the central hole of a coil 7' which is fixedly connected to the transport stage 1'. One of the linear motors

is constituted by the yoke 5', permanent magnet 6', and coil 7'.

An encoder plate 12' mounted on the upper surface of the transport stage 1' and a sensor 13' disposed at the back of the yoke 5' constitute a linear encoder for detecting the position and speed of the transport stage 1'.

As described above, with this conventional optical head driving mechanism, the centers of the guide shafts 2' and 3' are not flush with the plane of driving force of the linear motors, a difference in height being present between them.

SUMMARY OF THE INVENTION

The present invention has been made in consideration of the above problems. It is an object of this invention to provide a linear motor for driving a card capable of making compact a card driving unit and obtaining appropriate acceleration/deceleration.

In order to achieve the above object of the present invention, there are provided:

a linear motor having a magnetic circuit and a moving coil, the magnetic circuit comprising a linear yoke provided at the center of the circuit and a pair of linear magnets, the linear yoke and the pair of linear magnets forming a pair of linear gaps with the linear yoke interposed therebetween, the magnetic circuit applying a magnetic field to the linear gaps, the movable coil mounted on the linear yoke of the magnetic circuit being moved along the linear yoke by an electromagnetic action to the magnetic circuit when the movable coil is powered, wherein

the linear magnet has a larger magnetic force at opposite end portions in the longitudinal direction of the linear magnet than at an intermediate area;

a linear motor having a magnetic circuit and a moving coil, the magnetic circuit comprising a linear yoke and a linear magnet, the linear yoke and the linear magnet forming a linear gap with the linear yoke interposed therebetween, the magnetic circuit applying a magnetic field to the linear gap, the movable coil mounted on the linear yoke of the magnetic circuit being moved along the linear yoke by an electromagnetic action to the magnetic circuit when the movable coil is powered, wherein

the linear magnet has a considerably small magnetic force at an intermediate area in the longitudinal direction of the linear magnet than at opposite end portions thereof, and the magnetic reluctance of the magnetic circuit is made large to obtain a driving current of the movable coil corresponding to the magnetic reluctance when the moving coil moves at the intermediate area of the linear magnet; and

a linear motor having a magnetic circuit and a

moving coil, the magnetic circuit comprising a linear yoke and a linear magnet, the linear yoke and the linear magnet forming a linear gap with the linear yoke interposed therebetween, the magnetic circuit applying a magnetic field to the linear gap, the movable coil mounted on the linear yoke of the magnetic circuit being moved along the linear yoke by an electromagnetic action to the magnetic circuit when the movable coil is powered, wherein

the magnetic circuit is mounted on a plate made of material having the same magnetic reluctance as the linear yoke.

The magnetic flux density at the linear gap of the magnetic circuit constructed as above is large at opposite end portions of the linear gap and small at the intermediate area. When current flows through the moving coil, the electromagnetic action therefore becomes larger when the moving coil is at the opposite end portions than at the intermediate area, to thereby produce a larger mechanical action force at the opposite end portions. As a result, a large acceleration/deceleration force is applied to the moving coil at the opposite end portions of the linear gap, i.e., at the opposite end portions of the motion span of the moving coil.

Furthermore, the magnetic force of the linear magnet is made considerably smaller at the intermediate area in the longitudinal direction of the magnetic circuit than at the opposite end portions to limit the magnetic flux density at the opposite end portions. As a result, an operating point can be selected without magnetic saturation even with a compact magnetic circuit. Since the magnetic flux amount is reduced, a current to the moving coil is increased to prevent the thrust force from being lowered.

Since the magnetic circuit is mounted on the plate made of material having the same magnetic reluctance as that of the yoke, the plate integral with the magnetic circuit allows to pass magnetic fluxes.

According to the present invention, the magnetic force at the opposite end portions of the linear gap is made larger than at the intermediate area. Therefore, a large acceleration/deceleration force can be applied to the moving coil when it is at the opposite end portions. The time required for acceleration/deceleration becomes short, while efficiently controlling the acceleration/deceleration and preventing magnetic saturation of the yoke at the opposite end portions. Thus, a yoke can be made compact with a simple and cost effective manner.

Furthermore, the magnetic force of the linear motor is made considerably smaller at the intermediate area in the longitudinal direction of the magnetic circuit than at the opposite end portions to thereby move the operating point and increase the current supplied to the moving coil. Therefore,

even a compact magnetic circuit will not generate magnetic saturation, thereby providing a compact linear motor.

Still further, the magnetic circuit is mounted on the plate made of material having the same magnetic reluctance as that of the yoke. Therefore, the magnetic circuit can be made compact by the amount corresponding to the magnetic path given by the plate.

BRIEF DESCRIPTION OF THE DRAWINGS

Figs. 1 to 4 are perspective views and cross sectional views showing embodiments of a linear motor used with an optical card recording/reproducing apparatus according to the present invention;

Fig. 5 is a schematic diagram illustrating the concept of a linear motor;

Fig. 6 shows a magnetic flux density at the gap between the permanent magnet and the linear yoke;

Fig. 7 is a graph showing a card speed relative to a card position represented by the abscissa; Fig. 8 shows the magnetic circuit arrangement and its magnetic flux distribution according to another embodiment of this invention;

Fig. 9 shows a change in the operating point of the magnetic circuit shown in Fig. 8;

Fig. 10 shows the waveform of a current flowing through the coil of the embodiment shown in Fig. 8;

Figs. 11 and 12 are a plan view and a cross sectional side view showing an example of a card transport apparatus using the embodiment of the linear motor shown in Fig. 8;

Figs. 13 to 15 are a plan view, a side view, and a bottom view showing another example of a card transport apparatus using the embodiment of the linear motor shown in Fig. 8;

Figs. 16 to 18 are a front view, a cross section side view, and a bottom view showing another example of a card transport apparatus using the embodiment of the linear motor shown in Fig. 8; Figs. 19 and 20 show a magnetic circuit composed of linear magnets 126; and 126; having a magnetic characteristic different from a magnet 126g;

Fig. 21 is a schematic diagram showing the card transport section of an optical recording/reproducing apparatus according to an embodiment of this invention;

Fig. 22 shows the structure of the linear motor of Fig. 21;

Fig. 23 is a cross sectional view taken along line A-A of Fig. 22;

Fig. 24 shows the operation characteristics of the linear motor shown in Fig. 21;

Figs. 25 to 27 show another embodiment of a linear motor;

Figs. 28 to 31 show an embodiment of a card transport unit according to the present invention; Figs. 32 and 33 show another embodiment of an optical head transport unit;

Figs. 34 and 35 show an example of a conventional linear motor;

Fig. 36 shows an example of another conventional linear motor;

Fig. 37 shows an example of a still further conventional linear motor; and

Figs. 38 and 39 show an example of a conventional optical head driving mechanism using linear motors.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figs. 1 to 4 are perspective views and cross sectional views showing embodiments of a linear motor used with an optical card recording/reproducing apparatus according to the present invention.

In the embodiment shown in Figs. 1 and 2, the recording/reproducing apparatus is constructed such that an optical card can be automatically mounted on and dismounted from a shuttle 20. This shuttle 20 is slidably held by two slide shafts 21 and 22 which are fixedly mounted in parallel with each other.

An optical card is pulled in within the apparatus by a card pull-in mechanism (not shown) at a card inlet side, and placed on the shuttle 20. In order to reciprocally move the shuttle 20 along the slide shafts 21 and 22, a moving coil 23 is provided movably inserted in juxtaposed linear yokes 25a and 25b.

The moving coil 23 is wound without using a bobbin by bonding coil windings together. It is apparent that a bobbin may be made to make the moving coil 23.

Other yokes 25a' and 25b' generally of a rectangular shape having an open side and opposite end portions being bent, are coupled to the linear yokes 25a and 25b, respectively, with linear gaps being interposed therebetween. The central linear areas of the other yokes 25a' and 25b' extend in parallel with the linear yokes 25a and 25b.

Permanent magnets 26 and 27 are mounted inside of the one-side opened yokes 25a' and 25b' to generate magnetic fluxes traversing the moving coil 23 and generate magnetic fields propagating within the linear gaps in the same direction. In this manner, a linear motor is completed.

When current flows through the moving coil 23, the shuttle 20 reciprocally moves along the slide shafts 21 and 22, the direction of motion being

determined by the polarity of the current.

Each of the permanent magnets 26 and 27 is constructed of a combination of magnets having different magnetic forces. Namely, the permanent magnet 26 is constructed of magnets 26₁ and 26₂ - (such as samarium cobalt magnet) at opposite ends and a magnet 26₃ (a cheap magnet such as a ferrite magnet) at the center. The permanent magnet 27 is constructed of magnets 27₁ and 27₂ - (such as samarium cobalt magnet) at opposite ends and a magnet 27₃ (a cheap magnet such as a ferrite magnet) at the center. The magnets at the opposite ends have a larger energy product than that of the center magnet.

A light shielding plate (not shown) is mounted below the shuttle 20 for detecting the position of the shuttle 20 by shielding or exposing light. There is also provided a scale (not shown) printed with a clock pattern, the scale being disposed along the direction of movement of the shuttle 20 and detected with a linear encoder sensor to generate an encoder pulse.

The shuttle 20 is accelerated, decelerated, or stopped at the opposite end portions of the linear gaps, during the reciprocal motion of the shuttle 20 by the linear motor. A strong magnetic force is required at the acceleration/deceleration speed area, whereas not so strong magnetic force is required at a constant speed area intermediate between the opposite end portions. For example, if an acceleration speed is raised using a single magnet constituting a magnetic circuit, the magnetic force becomes too strong at the constant speed area. As a result, in order to avoid magnetic saturation at the opposite end portions of the linear yokes and other yokes, an outer dimension of the linear motor becomes correspondingly large and the cost becomes high. In other words, if a single permanent magnet (ferrite) having a weak magnetic force and constituting a magnetic circuit is used, the area of the magnet and the dimension of the yokes become large in order to increase the magnetic force for dealing with a necessary acceleration/deceleration speed, and the cost becomes high correspondingly.

On the contrary, according to the present invention, the magnets 26₁ and 26₂ of the permanent magnet 26 are constructed of magnets having a stronger magnetic force such as samarium cobalt magnets than that of the ferrite magnet 26₃ at the center at the constant speed area. Accordingly, a stronger thrust force (anti-thrust force) can be obtained for acceleration (deceleration) at the opposite end portions, while making the outer dimension of the yokes smaller than conventional. With the above arrangement, it is therefore possible to efficiently obtain a necessary thrust force.

In the above embodiment, the ferrite magnet

26₂ at the center have the same thickness as that of the permanent magnets 26₁ and 26₃ at the opposite ends. The thickness of the magnet 26₂ may be made smaller than that of the opposite end magnets 26₁ and 26₃ so that the magnetic flux density at the gap of the central magnet 26₂ can be adjusted.

Figs. 3 and 4 show another embodiment of the linear motor used with a recording/reproducing apparatus. In Figs. 3 and 4, like elements to those shown in Fig. 1 are represented by using identical reference numerals. In contrast with the linear motor shown in Figs. 1 and 2 having one moving coil movable along the central linear yokes, moving coils 28₁ and 28₂ are used to obtain a thrust force, the moving coil 28₁ being provided for the combination of a linear yoke 25a, another yoke 25a', and a permanent magnet 26, and the moving coil 28₂ being provided for the combination of a linear yoke 25b, another yoke 25b', and a permanent magnet 27. The moving coils 28₁ and 28₂ are disposed at opposite sides of a shuttle 20 and are movable along the linear yokes 25a and 25b inserted into the coils.

Fig. 5 is a schematic diagram illustrating the concept of a linear motor. In Fig. 5, a yoke assembly is composed of a yoke 25a' and a linear yoke 25a extending in parallel with a gap interposed therebetween. A permanent magnet 26 is mounted at the side of the yoke 25a' for the generation of magnetic fluxes traversing a coil 28₁. The permanent magnet 26 is constructed of magnets 26₁ and 26₂ at opposite ends having a large energy product such as a samarium cobalt magnet, and a magnet 26₃ at the center having a small energy product such as a ferrite magnet. These magnets are bonded together with adhesive agent to form the integral permanent magnet 26.

Fig. 6 shows a magnetic flux density at the gap between the permanent magnet and the linear yoke. The magnetic flux density at the opposite end portions is for example about 4000 Gauss, and that at the constant speed area is equal to or one half 4000 Gauss.

Fig. 7 is a graph showing a card speed relative to a card position represented by the abscissa. As seen from the acceleration/deceleration characteristics of Fig. 7, rapid acceleration and deceleration can be achieved in a short time period.

Fig. 8 shows the magnetic circuit arrangement and its magnetic flux distribution according to another embodiment of this invention. In Fig. 8, a yoke assembly is composed of a yoke 25a' and a linear yoke 25a extending in parallel with a gap interposed therebetween. A permanent magnet 26 is mounted at the side of the yoke 25a' for the generation of magnetic fluxes traversing a coil 28₁. The permanent magnet 26 is constructed of mag-

nets 26₁ and 26₃ at opposite ends having a large energy product such as a samarium cobalt magnet, and a magnet 26₂ at the center having a considerably small energy product such as a ferrite magnet. These magnets are bonded together with adhesive agent to form the integral permanent magnet 26. With this arrangement, the operating point of the magnetic circuit changes.

Fig. 9 shows a change of the operating point of the magnetic circuit shown in Fig. 8. An operating point (P) at the magnetic flux density Bd and coercive force Hd changes to an operating point (P') at the magnetic flux density Bd'.

Fig. 10 shows the waveform of a current flowing through the coil of the embodiment shown in Fig. 8. Before and after a change of the operating point, the acceleration pulse and deceleration pulse having a maximum value Is do not change at the acceleration/deceleration area, but the current at the constant speed area increases from Ib indicated by a broken line to Ic indicated by a solid line.

Figs. 11 and 12 are a plan view and a cross sectional side view showing an example of a card transport apparatus using the embodiment of the linear motor shown in Fig. 8. Linear motors of the embodiment shown in Fig. 8 are mounted at opposite sides of a card transport stage 20 to move the stage 20 along guide shafts 22.

Figs. 13 to 15 are a plan view, a side view, and a bottom view showing another example of a card transport apparatus using the embodiment of the linear motor shown in Fig. 8. A linear motor of the embodiment shown in Fig. 8 is mounted on the bottom of a card transport stage 20 which moves in the longitudinal direction of the yoke 25a, i.e., upward and downward as viewed in Figs. 13 and 14.

Figs. 16 to 18 are a front view, a cross sectional side view, and a bottom view showing another example of a card transport apparatus using the embodiment of the linear motor shown in Fig. 8. In this case, a magnetic circuit is mounted on a plate having a small magnetic reluctance so that it can be made compact.

Figs. 19 and 20 show a magnetic circuit composed of linear magnets 126₁ and 126₃ having a magnetic characteristic different from a magnet 126₂. The magnets 126₁, 126₂, and 126₃ have the same thickness so that the magnetic circuit can be formed compact or thin.

Fig. 21 is a schematic diagram showing the card transport sector of an optical recording/reproducing apparatus according to an embodiment of this invention. In this embodiment, a shuttle 120 slides along slide shafts by the operation of a magnetic circuit 121 constituting a linear motor.

Fig. 22 shows the structure of the linear motor

of Fig. 21, and Fig. 23 is a cross sectional view taken along line A-A of Fig. 22.

The optical card recording/reproducing apparatus of this embodiment is constructed such that an optical card can be automatically mounted on and dismounted from the shuttle 120. This shuttle 120 is slidably held by a pair of slide shafts 122a and 122b which are mounted at opposite sides of the linear motor in parallel with each other. Guide units 123 are provided under the shuttle 120 for coupling the shuttle 120 to the linear motor.

An optical card is pulled in within the apparatus by a card pull-in mechanism (not shown) at a card inlet side, and placed on the shuttle 120. In order to reciprocally move the shuttle 20 along the slide shafts 122a and 122b, there is provided within the magnetic circuit (linear motor) portion a moving coil 124 which is inserted into inner yokes 125 and 125' and movable along the longitudinal direction of the yokes.

The moving coil 124 is wound without using a bobbin by bonding coil windings together. It is apparent that a bobbin may be made to make the moving coil 124. The N poles of permanent magnets 126 and 126' are bonded to the opposite ends of the inner yokes 125 and 125', the permanent magnets generating magnetic fluxes traversing the moving coil 124. The S poles of the permanent magnets 126 and 126' are bonded to outer yokes 127 and 127'. In this manner, an inner-magnet type linear motor is completed.

In this embodiment, the inner yokes 125 and 125', outer yokes 127 and 127', and permanent magnets 126 and 126' are formed in a circular tube shape. The shape is not limited to this, but a rectangular tube shape may also be used.

The magnetic circuit (linear motor) 121 is mounted at the center of a shuttle driver unit to reciprocally move the shuttle 120. When current flows through the moving coil 124, the shuttle 120 reciprocally moves along the slide shafts 122a and 122b, the direction of motion being determined by the polarity of the current.

As shown in Fig. 22, there is provided a transport shaft 128 for fixing the moving coil of the linear motor to the bottom of the shuttle 120, the shaft 128 being allowed to move along a recess 129 within the motion span of the shuttle 120. The permanent magnets 126 and 126' are constructed of rare earth metal magnets such as samarium cobalt magnets having a stronger magnetic force than a ferrite magnet, so that the magnetic field can propagate to the central area of the inner yokes.

A light shielding plate (not shown) is mounted below the shuttle 120 for detecting the position of the shuttle 120 by shielding or exposing light. There is also provided a scale (not shown) printed with a

clock pattern, the scale being disposed along the direction of movement of the shuttle 120 and detected with a linear encoder sensor to generate an encoder pulse.

the shuttle 120 is accelerated, decelerated, or stopped at the opposite end portions of the linear gaps, during the reciprocal motion of the shuttle 120 by the linear motor. A strong magnetic force is required at the acceleration/deceleration speed area, whereas not so strong magnetic force is required at a constant speed area intermediate between the opposite end portions. For example, if an acceleration speed is raised using a single magnet constituting a magnetic circuit, the magnetic force becomes too strong at the constant speed area. As a result, in order to avoid magnetic saturation at the opposite end portions of the linear yokes and other yokes, an outer dimension of the linear motor becomes correspondingly large and the cost becomes high. In other words, if a single permanent magnet (ferrite) having a weak magnetic force and constituting a magnetic circuit is used, the area of the magnet and the dimension of the yokes become large in order to increase the magnetic force for dealing with a necessary acceleration/deceleration speed, and the cost becomes high correspondingly.

On the contrary, according to the present invention, the magnets such as samarium cobalt magnets having a stronger magnetic force than a ferrite magnet are disposed within the linear motor at opposite end portions thereof. Accordingly, a stronger thrust force (anti-thrust force) can be obtained for acceleration (deceleration) at the opposite end portions, and a weaker magnetic field is applied to the central constant speed area, while making the outer dimension of the yokes smaller than conventional. With the above arrangement, it is therefore possible to make a linear motor of low cost and efficiently obtain a necessary thrust force.

In this embodiment, as seen from Fig. 23, the discrete outer yokes 127 and 127' are joined together, and the discrete inner yokes 125 and 125' are joined together, to thereby complete the linear motor.

Fig. 24(a) shows the distribution of the magnetic gap length between the outer and inner yokes. The magnetic gap length is short at opposite end portions of the linear motor in the longitudinal direction, and long at the intermediate area.

Fig. 24(b) shows a necessary driving force relative to the coil position. A large driving force becomes necessary at opposite end portions of the linear motor in the longitudinal direction.

Fig. 24(c) shows a necessary driving current for the driving force shown in Fig. 24(b) relative to the coil position. For the motion to the left indicated

by the left-direction arrow, a positive acceleration pulse is applied at the right end and a negative deceleration pulse at the left end, whereas for the motion to the right indicated by the right-direction arrow, a negative acceleration pulse is applied at the left end and a positive deceleration pulse at the right end.

Fig. 24(d) shows a card speed relative to the coil position. The acceleration/deceleration area is at opposite end portions of the linear motor, and the constant speed area is at the intermediate section.

Figs. 25 to 27 show another embodiment of a linear motor. The operation and effect of this embodiment are the same as those of the above-described inner-magnet type linear motor, so the outline thereof is omitted and only the difference therebetween will be described. The difference is that permanent magnets 130 and 130' are mounted on outer yokes at opposite end portions to form an outer-magnet type linear motor.

Figs. 28 to 31 show an embodiment of a card transport unit according to the present invention. Fig. 28 is a side view of the unit, Fig. 29 is a plan view of the unit, and Fig. 30 is a side view partially broken.

In this embodiment, an optical card information recording/reproducing apparatus is constructed such that an optical card can be automatically mounted on and dismounted from a card transport stage 220 (hereinafter called a shuttle). This shuttle 220 has slide bearings 222a and 222b formed at the bottom of the shuttle 220, and is slidably held by two guide shafts 221a and 221b which are fixedly mounted in parallel with each other at substantially the central area of the shuttle transport unit C. The guide shafts 221a and 221b are inserted into the slide bearings 222a and 222b so that the shuttle 220 is guided along the guide shafts 221a and 221b. The guide shafts 221a and 221b are, pushed and fixed in position by plate springs at opposite ends of the shafts.

An optical card is pulled in within the apparatus by a card pull-in mechanism (not shown) at a card inlet side, and placed on the shuttle 220. In order to reciprocally move the shuttle 220 along the guide shafts 221a and 221b, moving coils 223 wound about bobbins 224 are fixedly mounted at opposite sides of the shuttle 220. Inner driving yokes 225b and 225b' are inserted within the bobbins 224.

In this embodiment, the moving coils 223 are wound on the bobbins 224. However, the moving coil may be made without using a bobbin by bonding coil windings together.

Other yokes 225a and 225a' generally of a rectangular shape having an open side and opposite end portions being bent, are coupled to the

inner yokes 225b and 225b'. Permanent magnets are mounted on the inside of the other yokes, the magnets having a magnetic force sufficiently large for generating magnetic fluxes traversing the moving coils 223. In this manner, the linear motor is completed. Two linear motors are provided at opposite sides of the shuttle transport unit to thereby reciprocally move the shuttle 220. When current flows through the moving coils 223, the shuttle 220 reciprocally moves along the guide shafts 221a and 221b, the direction of motion being determined by the polarity of the current.

Each of the permanent magnets 226 is constructed of a combination of two types of magnets having different magnetic forces. Namely, the permanent magnet 226 is constructed of magnets 226a and 226b having a large energy product of magnetic force such as samarium cobalt magnet at opposite ends and a magnet 226c having a smaller energy product of magnetic force than that of the magnets 226a and 226b such as a ferrite magnet at the center.

A light shielding plate 227 is mounted below the shuttle 220 for detecting the position of the shuttle 220 by interrupting or not interrupting light from an interrupter 228. There is also provided a scale 229 printed with a clock pattern, the scale being disposed below the shuttle 220 along the direction of movement of the shuttle 220 and detected with a linear encoder sensor 230 to generate an encoder pulse.

The card transport unit is constructed such that the plane of the driving force of the linear motor operating as driving means for the card transport stage 220 (shuttle) is made flush with the centers of the guide shafts 221a and 221b. The plane and centers are aligned in line as a reference shown in Fig. 31.

The shuttle 220 using the linear motor is accelerated, decelerated, or stopped at the opposite end portions of the linear gaps, during the reciprocal motion of the shuttle 220 by the linear motor. Conventionally, the plane of driving force of the linear motor is not flush with the centers of the guide shafts at the acceleration/deceleration speed area. As a result, upon application of a rapid acceleration/deceleration force during the reciprocal motion, abnormal vibrations and noises are likely to occur. In addition, frictional resistance between the guide shafts and slide bearings becomes large, adversely affecting information recording/reproducing.

Since the plane of driving force is made flush with the centers of the guide shafts, such disadvantages can be eliminated to suppress the adverse effects by the card transport unit.

Figs. 32 and 33 are a plan view and a side view showing another embodiment of an optical

head transport unit. The optical head transport unit reciprocally moves the optical head transport stage from which a laser beam is radiated, and uses linear motors as a driving means.

The optical head transport stage 231 has an optical head for radiating a laser beam. Two parallel guide shafts 232a and 232b are mounted at opposite sides of the optical head transport stage 231. The two guide shafts 232a and 232b are received by two slide bearings 233a and 233b mounted at opposite sides of the optical head transport stage 231, so that the transport stage 231 can be guided by the guide shafts 232a and 232b.

Moving coil type linear motors are provided at opposite sides of the optical head transport stage 231 to thereby move the optical head stage 231 up and down as viewed in the plan view of Fig. 32.

On one sides of the guide shafts, yokes 235a and 235b generally of a rectangular shape having an open side are mounted on support plates 234a and 234b, and joined to inner yokes 236a and 236b. Permanent magnets 237a and 237b magnetized in its thickness direction are mounted inside of the outer yokes 235a and 235b. The inner yokes 236a and 236b are inserted into moving coils 238a and 238b connected to the opposite sides of the optical head transport stage 231.

On one side of the optical head transport stage 231, there is provided an encoder scale 239 for detecting the position and speed of the transport stage. The encoder scale 239 is read by an encoder sensor 240 fixedly mounted on the support plate 234a.

When current flows through the moving coils 238a and 238b, the optical head transport stage 231 moves forward and backward. The centers of the guide shafts 232a and 232b are made flush with the plane of driving force by the moving coils 238a and 238b constituting the linear motor driving unit.

Similar to the above-described card transport unit, even if rapid acceleration/deceleration is applied to the transport stage during the reciprocal motion, it is possible to realize an optical head transport unit in which abnormal vibrations and noises will not occur and frictional resistance is small.

Claims

1. A linear motor having a magnetic circuit and a moving coil, said magnetic circuit comprising a linear yoke provided at the center of said circuit and a pair of linear magnets, said linear yoke and said pair of linear magnets forming a pair of linear gaps with said linear yoke interposed therebetween, said magnetic circuit applying a magnetic field to said linear gaps, said

movable coil mounted on said linear yoke of said magnetic circuit being moved along said linear yoke by an electromagnetic action to said magnetic circuit when said movable coil is powered, wherein

said linear magnet has a larger magnetic force at opposite end portions in the longitudinal direction of said linear magnet than at an intermediate area.

2. A linear motor according to claim 1, wherein said linear magnet is constructed of magnets having a large energy product at opposite end portions in the longitudinal direction of said magnet and a magnet having a small energy product at an intermediate area.
3. A linear motor according to claim 1, wherein said magnetic circuit is constructed such said circuit is divided into two portions at the center line of said linear yoke in the longitudinal direction.
4. A linear motor having a magnetic circuit and a moving coil, said magnetic circuit comprising a linear yoke and a linear magnet, said linear yoke and said linear magnet forming a linear gap with said linear yoke interposed therebetween, said magnetic circuit applying a magnetic field to said linear gap, said movable coil mounted on said linear yoke of said magnetic circuit being moved along said linear yoke by an electromagnetic action to said magnetic circuit when said movable coil is powered, wherein
said linear magnet has a considerably smaller magnetic force at an intermediate area in the longitudinal direction of said linear magnet than at opposite end portions thereof, and the magnetic reluctance of said magnetic circuit is made large to obtain a driving current of said movable coil corresponding to said magnetic reluctance when said moving coil moves at the intermediate area of said linear magnet.
5. A linear motor having a magnetic circuit and a moving coil, said magnetic circuit comprising a linear yoke and a linear magnet, said linear yoke and said linear magnet forming a linear gap with said linear yoke interposed therebetween, said magnetic circuit applying a magnetic field to said linear gap, said movable coil mounted on said linear yoke of said magnetic circuit being moved along said linear yoke by an electromagnetic action to said magnetic circuit when said movable coil is powered, wherein
said magnetic circuit is mounted on a plate

made of material having the same magnetic reluctance as said linear yoke.

6. A linear motor comprising:

a pair of elongated outer and inner yokes disposed concentrically, a magnetic gap being formed between said outer and inner yokes;

a permanent magnet mounted at least one end portion of said outer and inner yokes for applying a magnetic field to said magnetic gap; and

a moving coil surrounding said inner yoke and movable within said magnetic gap in the longitudinal direction of said inner yoke, said moving coil providing an electromagnetic action to said magnetic field generated by said permanent magnet when said moving coil is powered.

7. A linear motor according to claim 6, wherein said magnetic gap is concentric relative to said yokes, and an action force pickup unit of said moving coil protrudes externally via said outer yoke.

8. A linear motor according to claim 6, wherein said magnetic gap has a short gap length at opposite end portions of a motion path of said moving coil and a long gap length at an intermediate area.

9. An information recording/reproducing apparatus having a card transport stage for transporting an information recording medium and a laser unit for radiating a laser beam to said information recording medium, said information recording/reproducing apparatus writing and reading information to and from said information recording medium while reciprocally moving said card transport stage and linearly and reciprocally moving said information recording medium and applying a laser beam to said information recording medium, wherein

said apparatus comprising a transport unit wherein the plane of driving force by driving means for reciprocally moving said card transport stage is made substantially flush with the center of a guide shaft for sliding said transport stage.

10. An information recording/reproducing apparatus according to claim 9, wherein said driving means is constructed of a linear motor.

11. An information recording/reproducing apparatus having a card transport stage for holding in position an information recording medium and an optical head transport stage for radiating a

laser beam while performing a relative motion to said information recording medium on said card transport stage, said information recording/reproducing apparatus writing and reading information to and from said information recording medium while linearly and reciprocally moving said optical head transport stage, wherein

said apparatus comprising an optical head transport unit wherein the plane of driving force by driving means for reciprocally moving said optical head transport stage is made substantially flush with the center of a guide shaft for sliding said optical head transport stage.

12. An information recording/reproducing apparatus according to claim 11, wherein said driving means is constructed of a linear motor.

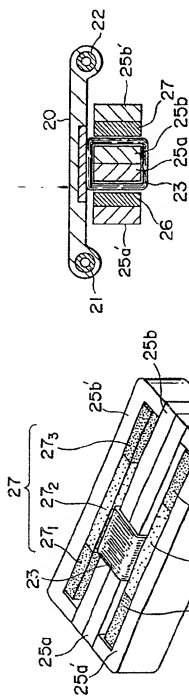


FIG. 1

FIG. 2

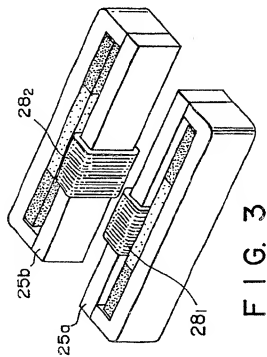


FIG. 3

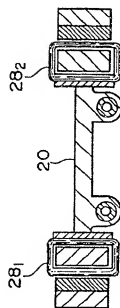


FIG. 4

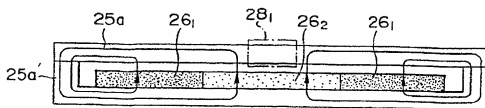


FIG. 5

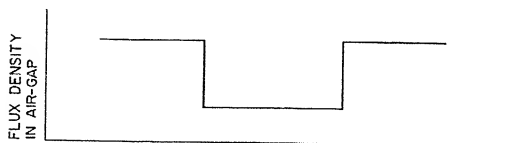


FIG. 6

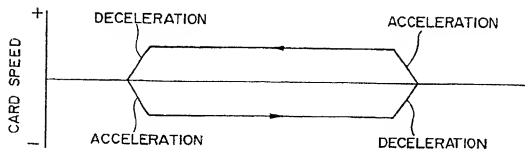


FIG. 7

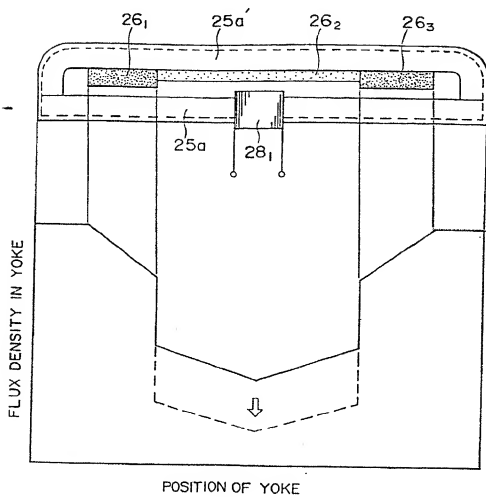


FIG. 8

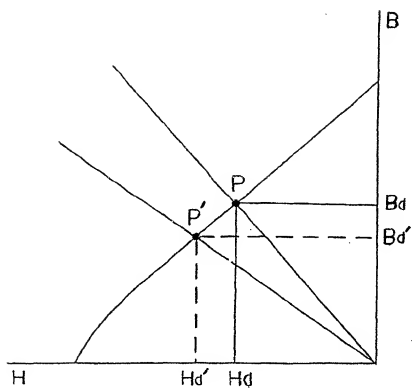


FIG. 9

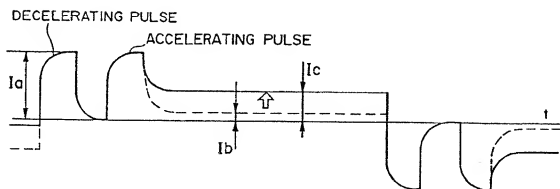


FIG. 10

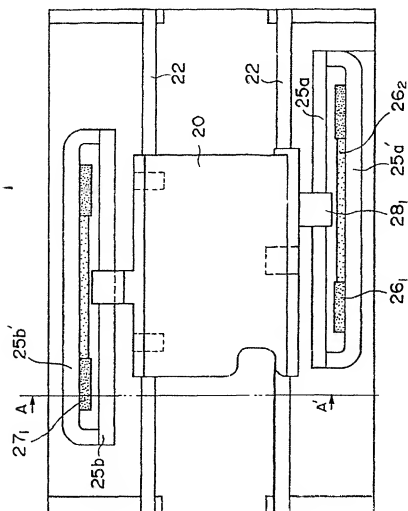


FIG. 11

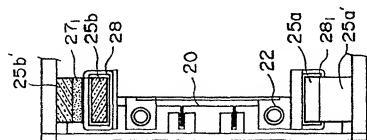


FIG. 12

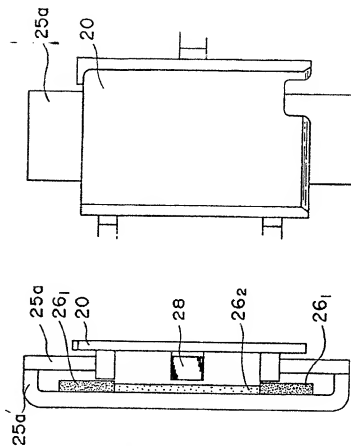


FIG. 14

FIG. 13




FIG. 15

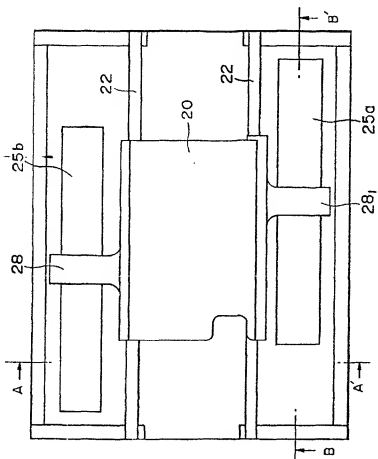


FIG. 16

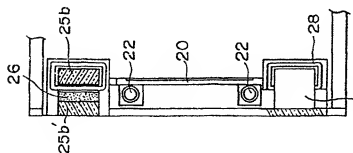


FIG. 17




FIG. 18

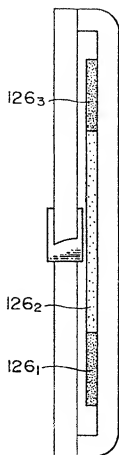


FIG. 19




FIG. 20

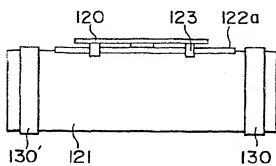


FIG. 25

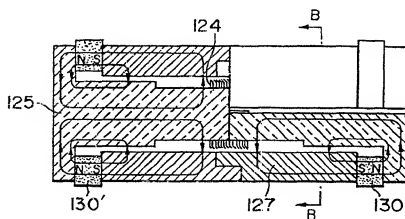


FIG. 26

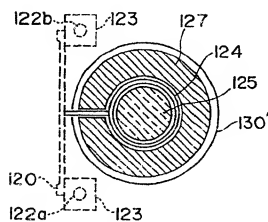


FIG. 27




FIG. 28

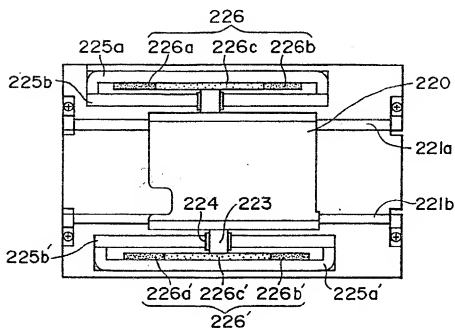


FIG. 29




FIG. 30




FIG. 31

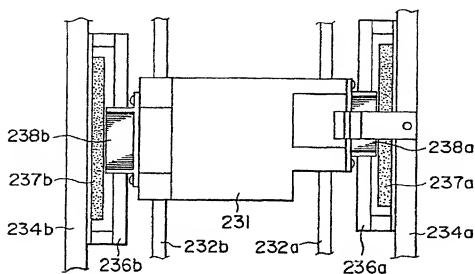


FIG. 32

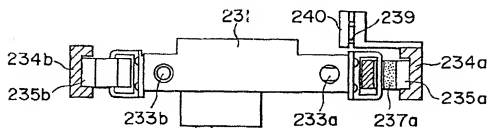


FIG. 33

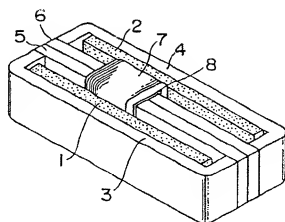


FIG. 34

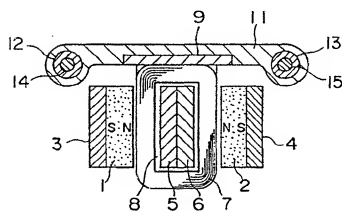


FIG. 35

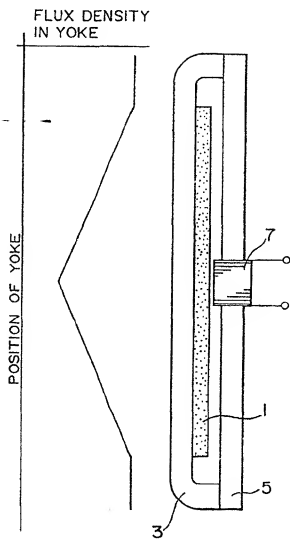


FIG. 36

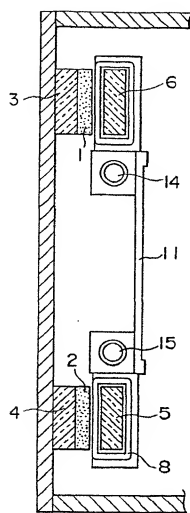


FIG. 37

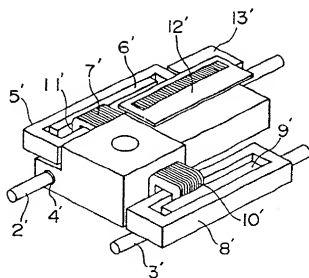


FIG. 38




FIG. 39

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number:

0 451 773 A3

(12)

EUROPEAN PATENT APPLICATION(21) Application number: **91105570.5**

(51) Int. Cl.⁵: **H02K 41/035, G11B 19/20,
G11B 17/022, G06K 13/06,
G11B 7/085**

(22) Date of filing: **09.04.91**

(30) Priority: **09.04.90 JP 93505/90**
— **09.04.90 JP 93506/90**
12.04.90 JP 97216/90

(43) Date of publication of application:
16.10.91 Bulletin 91/42

(60) Designated Contracting States:
CH DE ES FR GB IT LI SE

(60) Date of deferred publication of the search report:
20.05.92 Bulletin 92/21

(71) Applicant: **NIPPON CONLUX Co., Ltd.**
2-2, Uchisaiwai-Cho 2-Chome
Chiyoda-Ku Tokyo-To(JP)

(72) Inventor: **Yamazaki, Koichi**
25, Koyama
Sakado-Shi, Saitama-Ken(JP)
Inventor: **Noda, Kazuo**
4-15-5, Hirado, Totsuka-Ku
Yokohama-Shi, Kanagawa-Ken(JP)
Inventor: **Nakamura, Eiichi**
4-5-7, Nishi-Hashimoto
Sagamihara-Shi, Kanagawa-Ken(JP)

(24) Representative: **Reichet, Wolfgang, Dipl.-Ing.**
et al
Reichet und Reichet Parkstrasse 13
W-6000 Frankfurt am Main 1(DE)

(94) **Linear motor.**

(60) A linear motor having a magnetic circuit and a moving coil, the magnetic circuit comprising a linear yoke provided at the center of the circuit and a pair of linear magnets, the linear yoke and the pair of linear magnets forming a pair of linear gaps with the linear yoke interposed therebetween, the magnetic circuit applying a magnetic field to the linear gaps, the movable coil mounted on the linear yoke of the magnetic circuit being moved along the linear yoke by an electromagnetic action to the magnetic circuit when the movable coil is powered, wherein the linear magnet has a larger magnetic force at opposite end portions in the longitudinal direction of the linear magnet than at an intermediate area, the magnetic reluctance of the magnetic circuit is made large to obtain a driving current of the movable coil corresponding to the magnetic reluctance when the moving coil moves at the intermediate area of the

linear magnet, or the magnetic circuit is mounted on a plate made of material having the same magnetic reluctance as the linear yoke. An information recording/reproducing apparatus having a card transport stage for transporting an information recording medium and a laser unit for radiating a laser beam to the information recording medium, the information recording/reproducing apparatus writing and reading information to and from the information recording medium while reciprocally moving the card transport stage and linearly and reciprocally moving the information recording medium and applying a laser beam to the information recording medium, wherein the apparatus comprising a transport unit wherein the plane of driving force by driving means for reciprocally moving the card transport stage is made substantially flush with the center of a guide shaft for sliding the transport stage.

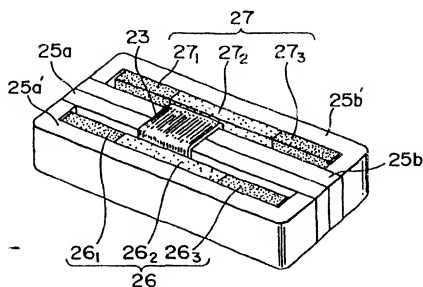


FIG. 1



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 91 10 5570

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
X	PATENT ABSTRACTS OF JAPAN, vol. 11, no. 325 (E-551)[2772], 22nd October 1987; & JP-A-62 114 459 (HITACHI METALS LTD) 26-05-1987 * Whole abstract *	1,2	H 02 K 41/035 G 11 B 19/20 G 11 B 17/022 G 06 K 13/06 G 11 B 7/085
Y	IDEM ---	3	
X	EP-A-0 326 374 (SONY CORP.) * Column 1, line 1 - column 2, line 60; figures 1-12 *	5	
Y	---	3	
X	PATENT ABSTRACTS OF JAPAN, vol. 6, no. 25 (E-94)[903], 13th February 1982; & JP-A-56 145 770 (RICOH K.K.) 12-11-1981 * Whole abstract *	1,4	
X	US-A-3 149 254 (CARTER et al.) * Column 1, line 45 - column 3, line 67; figures 1-4 *	6,7	
Y	---	1,4,8	TECHNICAL FIELDS SEARCHED (Int. Cl.5)
Y	PATENT ABSTRACTS OF JAPAN, vol. 12, no. 17 (E-574)[2864], 19th January 1988; & JP-A-62 173 968 (SUMITOMO SPECIAL METALS CO., LTD) 30-07-1987 * Whole abstract *	1,6	H 02 K G 11 B G 06 K H 04 R
Y	PATENT ABSTRACTS OF JAPAN, vol. 14, no. 241 (E-931)[4184], 22nd May 1990; & JP-A-2 65 647 (HITACHI LTD) 06-03-1990 * Whole abstract *	1,4,8	
	---	-/-	
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
THE HAGUE		07-02-1992	DEVERGRANNE C.A.
CATEGORY OF CITED DOCUMENTS			
<p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p>		<p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application I : document cited for other reasons A : member of the same patent family, corresponding document</p>	

PRO FISHAL (NO. 041) (P. 041)



European Patent
Office

EP 91 10 5570

CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

- ☐ All claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for all claims.
- ☐ Only part of the claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid.
- namely claims:
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirement of unity of invention and relates to several inventions or groups of inventions, namely:

See sheet -B-

- ☒ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid.
- namely claims:
- ☐ None of the further search fees has been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims.
- namely claims:



European Patent
Office

EUROPEAN SEARCH REPORT

Page 2

Application Number

EP 91 10 5570

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claims	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
Y	PATENT ABSTRACTS OF JAPAN, vol. 14, no. 162 (P-1029)[4105], 29th March 1990; & JP-A-2 018 751 (CANON INC.) 23-01-1990 * Abstract *	9-12	TECHNICAL FIELDS SEARCHED (Int. Cl.5)
Y	EP-A-0 091 112 (AGES ITALIA S.p.A.) * Page 3, line 16 - page 6, line 21; figures 1-5 *	9-12	
A	PATENT ABSTRACTS OF JAPAN, vol. 14, no. 166 (E-911), 30th March 1990; & JP-A-2 023 058 (NHK SPRING CO., LTD) 25-01-1990 * Abstract *	9,10	
A	US-A-4 414 594 (FARMER et al.) * Column 1, line 58 - column 2, line 59; figures 1-4 *	11,12	
A	PATENT ABSTRACTS OF JAPAN, vol. 12, no. 97 (P-682), 30th March 1988; & JP-A-62 229 531 (CANON INC.) 08-10-1987 * Abstract *	11,12	
A	PATENT ABSTRACTS OF JAPAN, vol 9, no. 97 (P-352), 26th April 1985; & JP-A-59 223 887 (SEIKO DENSHI KOGYO K.K.) 15-12-1984 * Abstract *	11,12	
A	PATENT ABSTRACTS OF JAPAN, vol. 6, no. 200 (E-135), 9th October 1982; & JP-A-57 110 069 (FUJITSU K.K.) 08-07-1982 * Abstract *	11,12	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 07-02-1992	Examiner DEVERGRANNE C.A.
CATEGORY OF CITED DOCUMENTS		<p>I : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons * : member of the same patent family, corresponding document</p>	
<p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p>			



European Patent
Office

EP 91 10 5570 -B-

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirement of unity of invention and relates to several inventions or groups of inventions, namely:

1. Claims 1-8: Linear motor.
2. Claims 9-12: Information recording/reproducing apparatus.